

Packaging of standard units

In their standard packaging, units are supplied with air inlet and air outlet protections. They are also supplied with lifting and handling brackets.


Two possible packaging solutions are available on request:

- **Shrink wrapping:** the standard packaging is further protected with shrink wrapping and reinforced corners.
- **Container packaging:** the machine is protected with shrink wrapping and reinforced corners, and is supplied with slides and bar for shipping in containers.

All the indications concerning the handling of the machine can be found in the dimensional drawing. The dimensional drawing is stored inside the electrical panel of the unit, together with all the accompanying documentation.

3.6.6 Information on the packaging

On the outside of shrink-wrapped units are dispatch labels and the drawing showing how to lift and handle the unit. All the other information regarding the unit can be found and are only visible after removing the shrink wrapping. Refer to the chapter "JOINING THE SECTIONS" for the electrical and mechanical connection of s-AIRME units in more than one section.

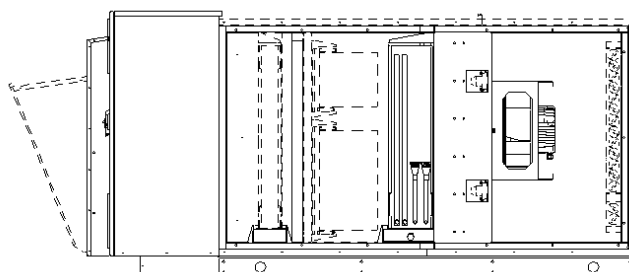


Dimensions and weight of standard units AR function

SIZE	LENGTH	WIDTH	HEIGHT	VERS. WEIGHT C	VERS. WEIGHT I	VERS. WEIGHT B
	[mm]	[mm]	[mm]	[kg]	[kg]	[kg]
s-AIRME 3000	2435	1025	965	310	315	320
s-AIRME 5000	2435	1425	965	410	420	430
s-AIRME 7500	2435	1525	1180	460	470	480
s-AIRME 10000	2535	1825	1235	490	500	510
s-AIRME 12500	2535	2025	1320	650	660	670
s-AIRME 15000	2535	2225	1430	730	760	790
s-AIRME 20000	2535	2525	1510	840	870	890

Dimensions and weight of standard units MF function

SIZE	LENGTH	WIDTH	HEIGHT	VERS. WEIGHT C	VERS. WEIGHT I	VERS. WEIGHT B
	[mm]	[mm]	[mm]	[kg]	[kg]	[kg]
s-AIRME 3000	2510	1025	965	340	345	350
s-AIRME 5000	2510	1425	965	440	450	460
s-AIRME 7500	2510	1525	1180	500	510	520
s-AIRME 10000	2610	1825	1235	530	540	560
s-AIRME 12500	2610	2025	1320	700	710	720
s-AIRME 15000	2610	2225	1430	790	820	840
s-AIRME 20000	2610	2525	1510	900	930	950

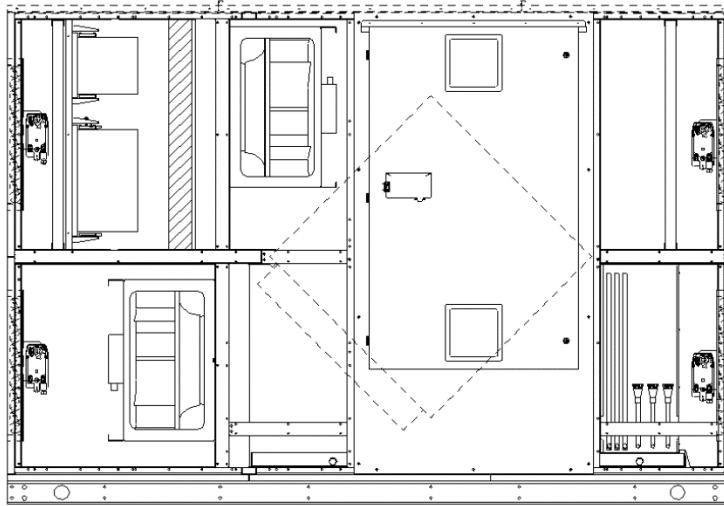

Dimensions and weight of standard units HR-P function

SIZE	LENGTH	WIDTH	HEIGHT	VERS. WEIGHT C	VERS. WEIGHT I	VERS. WEIGHT B
	[mm]	[mm]	[mm]	[kg]	[kg]	[kg]
s-AIRME 3000	2950	1385	1675	750	755	760
s-AIRME 5000	2950	1785	1675	950	960	970
s-AIRME 7500	3200	1885	2200	1250	1260	1270
s-AIRME 10000	3650	2185	2280	1600	1620	1630
s-AIRME 12500	3775	2385	2480	1750	1770	1800
s-AIRME 15000	3946	2585	2480	2100	2130	2150